

The SL2 tray sealer is the most **cost effective** and **versatile** machine in the PA range. **Environmentally efficient** and **reliable** the SL2 is the **ultimate** inline sealer.

SL2



perfectseal

- Can seal up to 45 packs per minute
- Indisputable reliability
- Environmental considerations incorporated into design
- 2 minute tool changeovers
- Ultra lightweight and quick release tooling
- Configurable for MAP-F
- High accuracy servo driven film feed system



perfectseal

SL2

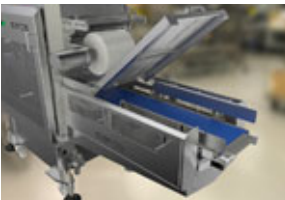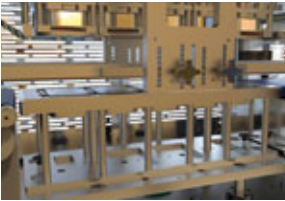

FEATURES

Machine

- Operation from both sides
- Operator friendly touch screen provides machine status, self diagnostics and operator prompts
- Pre-set accurate recipe based temperature control
- High accuracy servo driven film feed system with easy to follow film path
- FSP (Film Snap Protection)
- Hygienic, robust construction to food industry standards
- Quick and easy to remove infeed and outfeed flat PU belt conveyors for added hygiene
- Film as thin as 17 µm can be used to reduce packaging waste
- Fully portable, caster mounted
- Can accept rotary top tools with modified bases and new transfer arms

Tooling

- Removable tooling impressions allow for continuous operation of the machine
- Two minute tool changeover with quick release tools
- Lightweight tooling for manual loading
- Adjustable transfer arm heights cater for any depth of tray
- Quick release cutting blades
- Waterproof heater mats reduce failures during cleaning and reduce heat up times by up to 36%

Options



- MAP-F (Modified Atmosphere Packaging)
- Industrial remote access solution for remote diagnostics and program updates
- Eco-Cut™ - reducing film waste
- Foil crimping
- Inside cut for neater pack presentation
- Pre-printed or pre-punched registered film
- Through conveyor
- Date coder integration ready
- PCP (Pack Crush Protection) system

Service and Maintenance

All Packaging Automation machines are offered with a 12 month parts and labour warranty. A dedicated customer service team is ready to assist with service and maintenance calls and spare parts. Immediate technical phone support is available 24 hours a day 7 days a week.

Materials

The SL2 has the ability to heat seal reel fed film, pre-cut foil, paper or laminate lids to preformed trays and containers of CPET, polypropylene, PVC, styrene, board, smooth walled foil, pre-cut board, paper, plastic, foil lids and many other types of container.

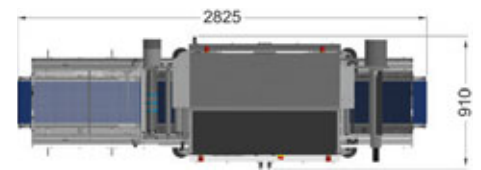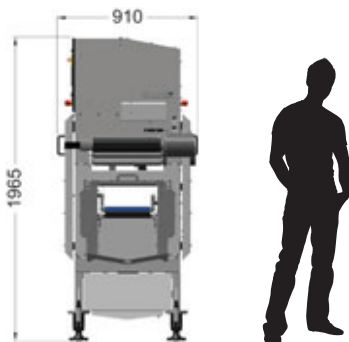

TECHNICAL INFORMATION

Height	1965mm
Length	2825mm
Width	910mm
Weight	750kg
Electrical supply	16A 415V 3 phase N+E 15A max/phase 50/60hz
Pneumatic supply	7.75cfm at 80psi (5.5 bar)
Production speed	15 cycles per minute

TRAY LAYOUT OPTIONS AND THROUGHPUTS

MAXIMUM DIMENSIONS (MM)					
Number of trays	Length of tray	Width	Depth	Diameter (circular trays)	Production speed per min (up to)
1	470	300	120	300	15
2	300	222	120	222	30
3	300	140	120	140	45

Supplied by:



t: +61 2 8882 9612
e: sales@perfectautomation.com.au
w: www.perfectautomation.com.au